
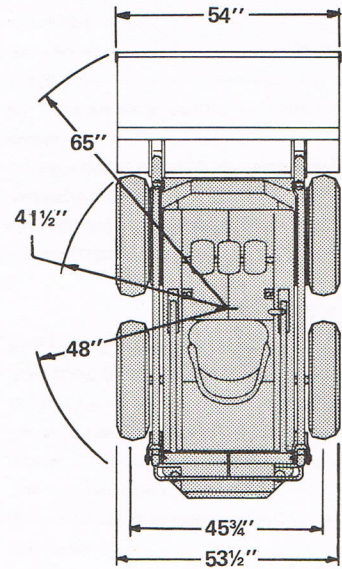


LOADER SPECIFICATIONS

(Diesel)

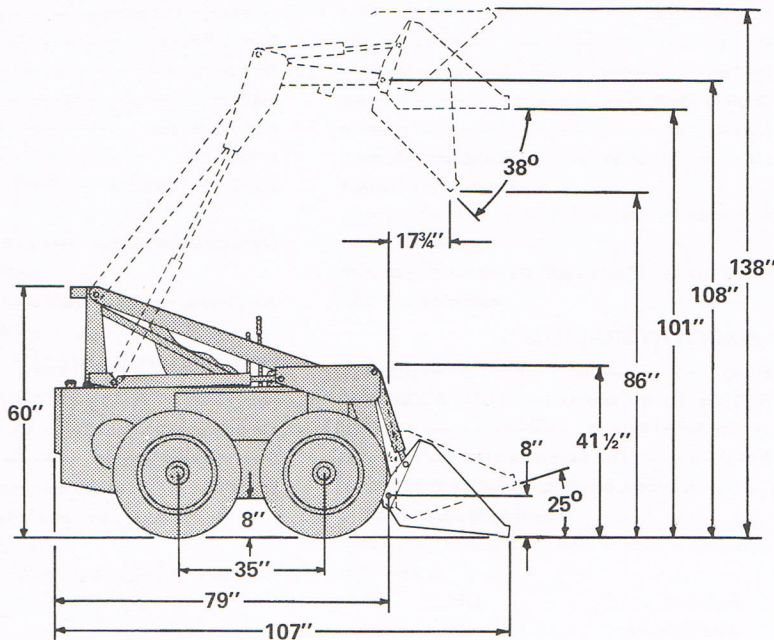

Dimensions are given for loader equipped with 3793-M dirt bucket and may vary with other bucket types.

Where applicable, specifications conform to IEMC & SAE standards and are subject to change without notice.

(Deutz)

(Petter)

OPERATIONAL & PERFORMANCE

Operating Weight ----- 4000 lbs.
US Bureau of Mines Approved ----- 3700 lbs.
Rated Operating Capacity ----- 1000 lbs.
Lifting Capacity to Maximum Height ----- 1700 lbs.
Tipping Load ----- 1830 lbs.

Hydraulic Function Time:

Raise to Maximum Height ----- 4.1 sec.
Lower from Maximum Height ----- 2.6 sec.
Dump Bucket ----- 1.6 sec.
Rollback Bucket ----- 1.6 sec.

Travel Speed ----- Infinitely variable to 4.4 MPH
forward & reverse

Controls:

Vehicle ----- Forward, reverse & steering
functions controlled by two hand levers.
Travel Speed ----- Hand lever controlled,
hydraulically adjusted variable sheave.
Loader-- Lift, tilt & auxiliary functions controlled
by separate foot pedals.
Engine ----- Hand lever throttle, push button
preheater & key type starter switch.

(Cont'd)

OPERATIONAL & PERFORMANCE

Operating Weight ----- 4020 lbs.
Rated Operating Capacity ----- 1000 lbs.
Lifting Capacity to Maximum Height ----- 1700 lbs.
Tipping Load ----- 1830 lbs.

Hydraulic Function Time:

Raise to Maximum Height ----- 4.3 sec.
Lower from Maximum Height ----- 2.7 sec.
Dump Bucket ----- 1.7 sec.
Rollback Bucket ----- 1.7 sec.

Travel Speed ----- Infinitely variable to 5.7 MPH
forward & reverse

Controls:

Vehicle ----- Forward, reverse & steering
functions controlled by two hand levers.
Travel Speed ----- Hand lever controlled
hydraulically adjusted variable sheave
Loader ----- Lift, tilt & auxiliary functions
controlled by separate foot pedals.
Engine ----- Hand lever throttle & key type
starter switch.

(Cont'd)